
EKOMAXX 800

- **Commercial Waste**
  Ø 12 – 25 t/h
- **Rubber and Waste Tires**
  Ø 7 – 15 t/h
- **Green Waste**
  Ø 35 – 80 t/h
- **Trunk Wood**
  Ø 15 – 35 t/h
- **Waste Wood**
  Ø 20 – 50 t/h
- **Paper and Cardboard**
  Ø 15 – 30 t/h

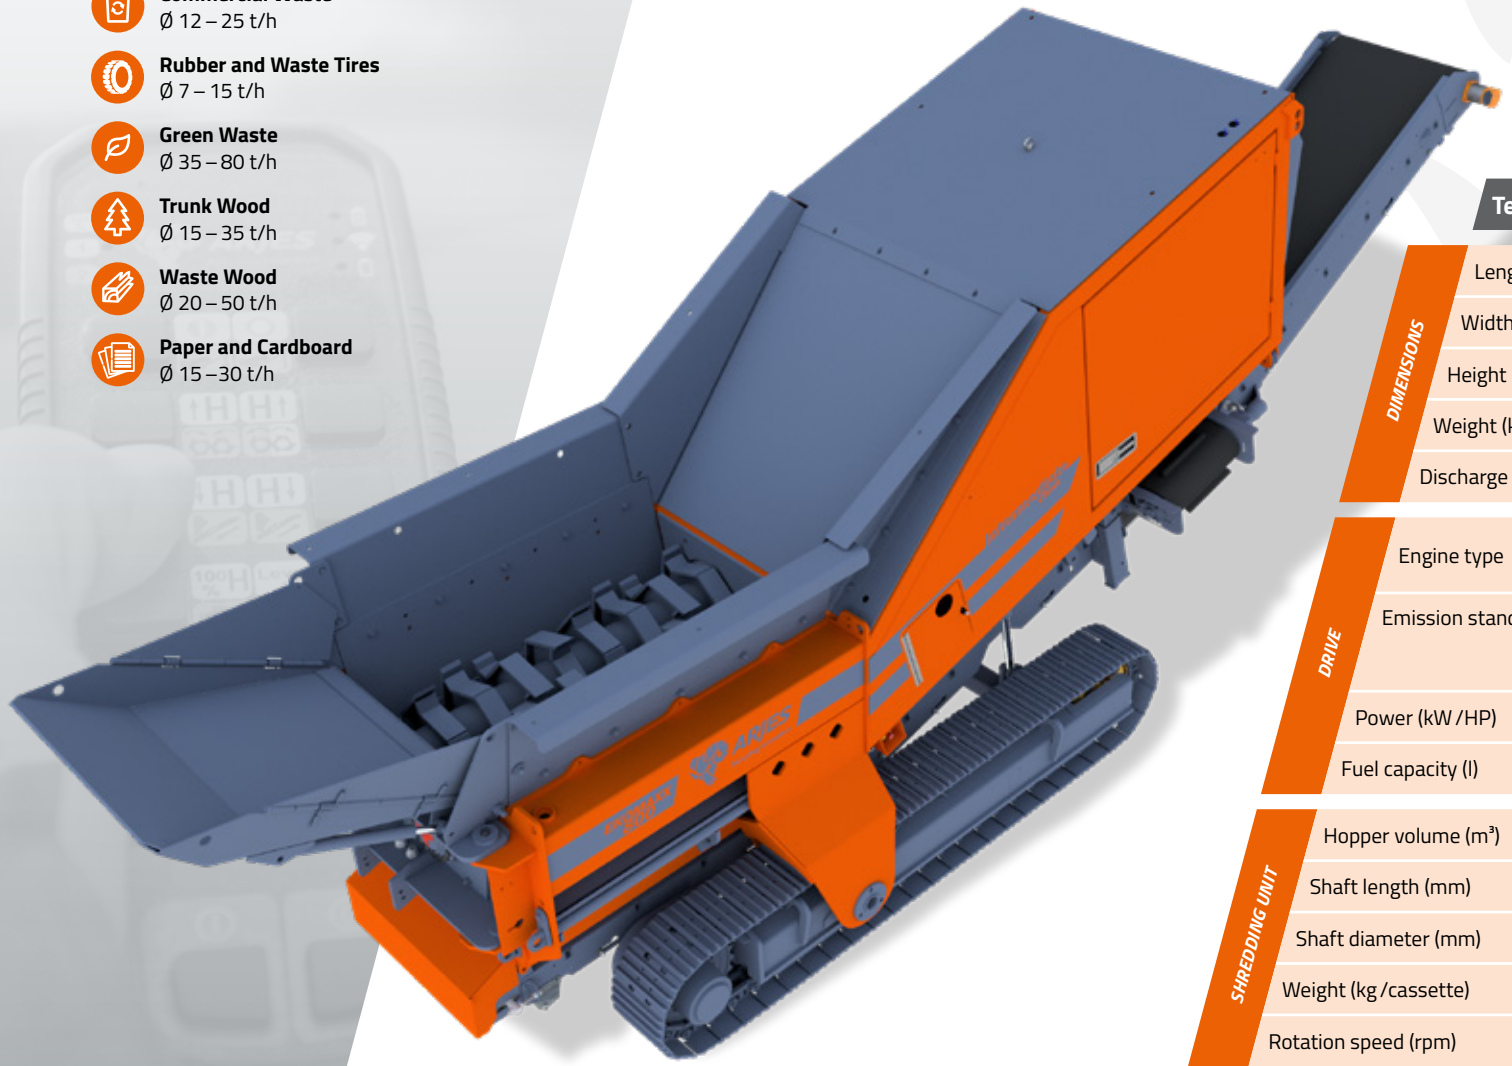

ARJES
Recycling Innovation

Technical Data

DIMENSIONS	Length (mm)	9,900 / 8,100 *(transport)*
	Width (mm)	2,450 / 2,450 *(transport)*
	Height (mm)	4,000 / 3,100 *(transport)*
	Weight (kg)	21,000
	Discharge height (mm)	3,300
DRIVE	Engine type	Diesel - TAD 883 VE *(EU/US)* Diesel - TAD 853 VE *(ROW)***
	Emission standard	Stage V *(EU)* / EPA Tier IV *(US)* Stage III A *(ROW)***
	Power (kW / HP)	235 / 320
	Fuel capacity (l)	400
SHREDDING UNIT	Hopper volume (m^3)	4.5 *(incl. tilting hopper)*
	Shaft length (mm)	2,000
	Shaft diameter (mm)	680
	Weight (kg / cassette)	3,500
	Rotation speed (rpm)	42

*Recommended retail price FCA plus applicable VAT and additional costs (transport, insurance, customs, etc.) as well as optional attachments
**Rest of the world (country-specific requirements) / Subject to technical changes and misprints. Status: January 2025

www.arjes.de