
TITAN 900

- **Commercial Waste**
  Ø 25 – 50 t/h
- **Rubber and Waste Tires**
  Ø 13 – 25 t/h
- **CFRP/GFRP Waste**
  Ø 15 – 30 t/h
- **Waste Wood**
  Ø 50 – 100 t/h
- **Wooden Railway Sleepers**
  Ø 25 –50 t/h
- **Aluminium**
  Ø 15 – 30 t/h

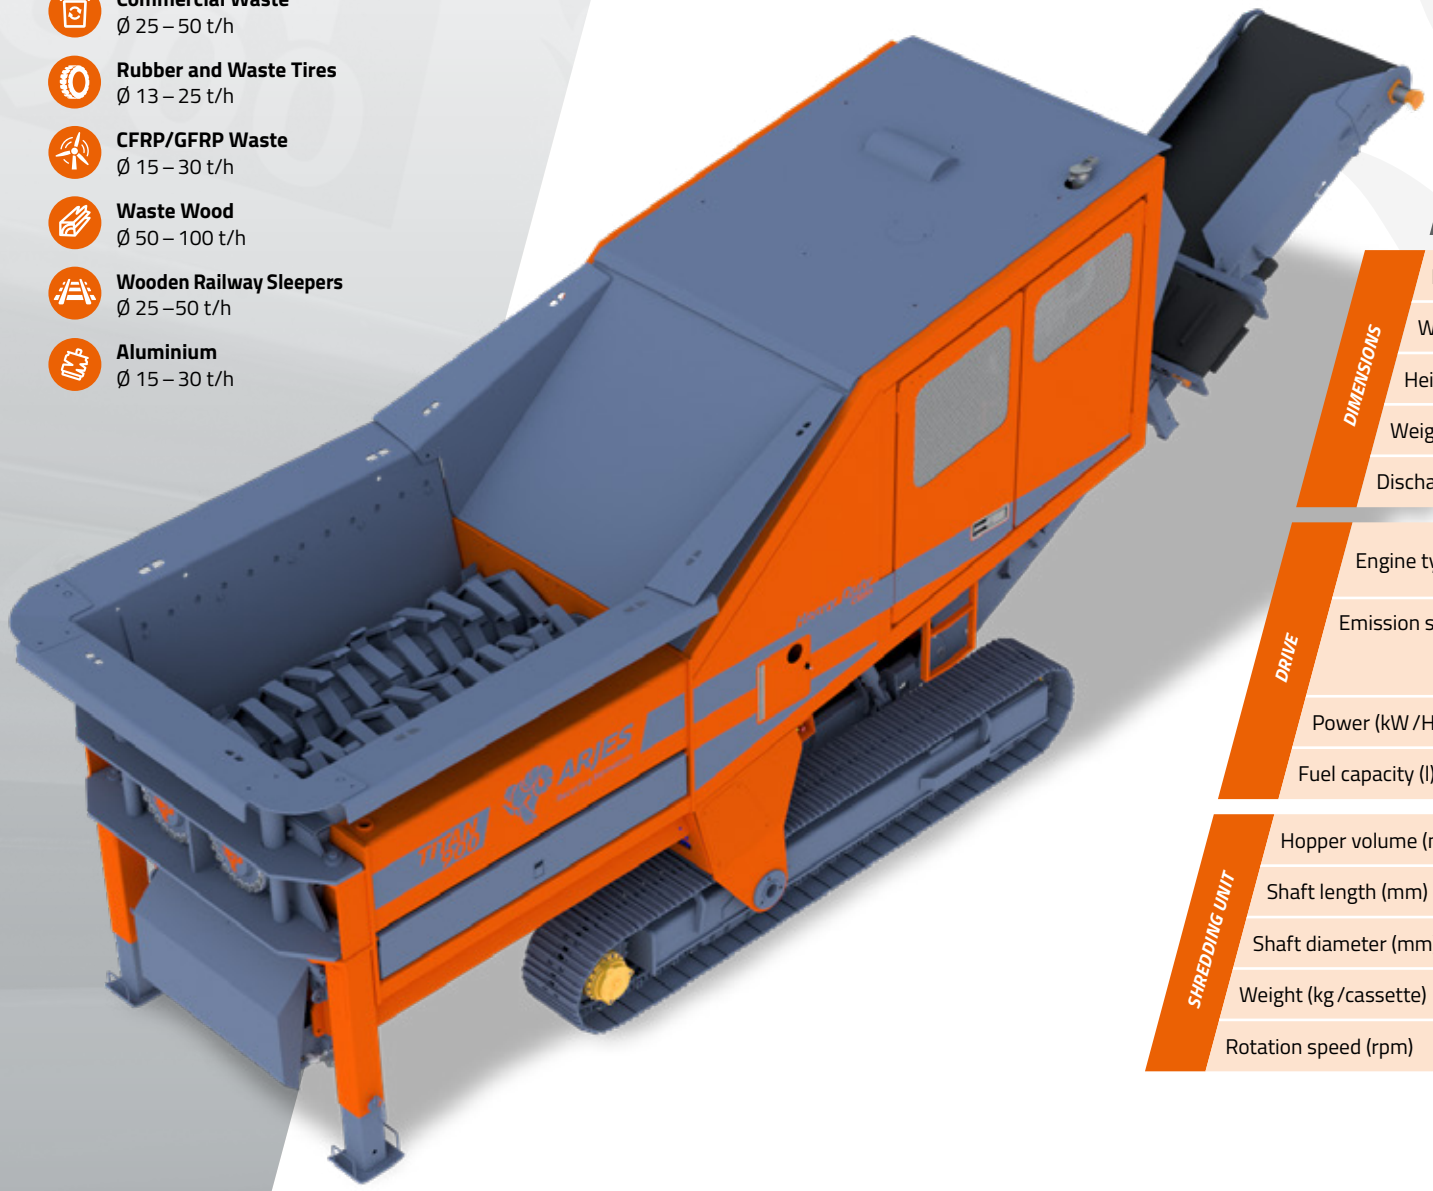

ARJES
Recycling Innovation

Technical Data

DIMENSIONS	Length (mm)	11,000 / 11,000 *(transport)*
	Width (mm)	3,000 / 3,000 *(transport)*
	Height (mm)	4,200 / 3,700 *(transport)*
	Weight (kg)	35,000
	Discharge height (mm)	3,500
DRIVE	Engine type	Diesel - TAD 1385 VE *(EU/US)* Diesel - TAD 1650 VE-B *(ROW)***
	Emission standard	Stage V *(EU)* / EPA Tier IV *(US)* Stage III A *(ROW)***
	Power (kW /HP)	405 / 550
	Fuel capacity (l)	800
SHREDDING UNIT	Hopper volume (m³)	5
	Shaft length (mm)	2,500
	Shaft diameter (mm)	860
	Weight (kg /cassette)	7,650
	Rotation speed (rpm)	45

*Recommended retail price FCA plus applicable VAT and additional costs (transport, insurance, customs, etc.) as well as optional attachments
**Rest of the world (country-specific requirements) / Subject to technical changes and misprints. Status: January 2025

www.arjes.de